

EFFECT OF THE ASPECT RATIO ON THE NATURAL
CONVECTION IN A RECTANGULAR POROUS MEDIUM

تأثير النسبة الباعية للاطوال على الحمل الطبيعي في وسط
مسامي ثنائي البعد في شكل متعامد

M. S. El Kady

Faculty of Engineering
Mansoura University, Egypt

خلاصه
يحتوي هذا البحث على دراسته عدديه لتأثير النسبه الباعية على
الحمل الطبيعي المستقر في هيكل ثنائي البعد في شكل متعامد مملوء بوسط
مسامي مشبع بالمائع. الجدران الراسيه للجيز غير موصلة للحراره
والافقيه ذات درجه حراره ثابتة مع وجود انحدار حراري رأسي فيه درجه
حراره الجدار السفلي اعلى منها على الجدار العلوي. تمت الدرسته
على نسب باعیه من 1 الى 8 وبمدى كبير من عدد دارسي-رايلي يصل حتى
1000 وتظهر نتائج الدرسته على هيئته مقارنة بين خطوط السريان وظروف
درجه الحراره الثابتة وعدد نوسيلت الموضوعي والخطي على الحوائط
الافقيه وكذلك عدد خلايا السريان.

بزياده النسبه الباعيه للاطوال يظهر سريان متعدد الخلايا ثنائي
البعد تزداد شدته بزياده عدد دارسي-رايلي، كما يزداد عدد خلايا
السريان وذلك بزياده النسبه الباعيه للاطوال. أما سرعه السريان
المتوسطه للمائع فهي لاتعتمد على نسبة الاطوال وتزداد خطياً بزياده عدد
دارسي-رايلي. كما تقل داله السريان الفوري للمائع مع زياده نسبة
الاطوال. أما نقط الانقلاب لمنحنى عدد نوسيلت الموضوعي على الحوائط
الافقيه فهي تحدث على نقط حدود خلايا السريان ويزداد عددها بزياده
النسبه الباعيه للاطوال. كذلك لايعتمد عدد نوسيلت الخطي للموائط
الافقيه ذات درجه الحراره الثابتة على النسبه الباعيه للاطوال ويزداد
بزياده عدد دارسي-رايلي حسب المعادله الآتية

$$Nu = 1.59344 \ln Ra - 5.186$$

ABSTRACT

The effect of the aspect ratio on natural convection in a two dimensional rectangular cavity filled with fluid saturated porous media is examined numerically. The vertical walls of the cavity are adiabatic and the horizontal walls are isothermal with lower hotter one and upper colder one. The test is done for aspect ratios 1 to 8 and wide range of Darcy-Rayleigh number Ra up to 800. Results are presented in terms of the streamlines and isotherms, maximum velocity and stream function, the local and global Nusselt number as well as the number of flow cells.

By the increase of the aspect ratio a two dimensional cellular pattern appears with vigorous motion as the Darcy-Rayleigh number increases. The number of flow cells increases with the aspect ratio. The non-dimensional average flow velocity is independent on the aspect ratio and increases linearly with the increase of Ra. The extremum value of non-dimensional stream function decreases with the increase of aspect ratio. The

turning points in the local Nu at the isothermal walls occurs at the boundaries of the cells. Its number equals to the cells number and increases as the aspect ratio increases. The global Nu at the isothermal walls is independent on the aspect ratio and increases with Ra due to the relation $Nu = 1.59344 \ln Ra - 5.186$.

1. INTRODUCTION

Owing to its numerous and wide ranging applications natural convection in porous medium has been the subject of many recent studies. For example, this phenomenon is encountered in the underground spreading of chemical wastes, water movements in geothermal systems, porous insulations, packed beds catalytic reactors, heat storage beds, nuclear waste disposal systems and sensible heat storage beds. Most of the previous studies have been theoretical, including natural temperature gradients [1,3], natural convection in boundary layer [4], and convective flows in horizontal porous layers heated from below [5,6].

In the previous work of the author [6] the phenomenon of natural convection in two dimensional rectangular enclosures filled with porous medium saturated with fluid under natural vertical temperature gradient was studied. An insight into the physical nature of the flow of the natural convection in the porous media showed that such convective flows strongly depends on the heating conditions, fluid type, porous material type and the system geometry [6].

The Darcy-Rayleigh number comes out as the coefficient of the buoyancy driving force along the flow. It includes all the parameters which express the porous media and the fluid. It expresses the porous media through the permeability and conductivity. It expresses the fluid through its density and viscosity. It includes also the operating driving conditions such as the temperature difference, coefficient of thermal expansion and the gravity effect. So, in the present work the effect of system geometry i.e. the aspect ratio, for a wide range of Darcy-Rayleigh number on the nature of the convective heat flow inside the rectangular porous media was studied and analyzed. The horizontal rectangular porous media considered in this study has a ratio of the width to the height equal and greater than unity.

2. FORMULATION OF THE PROBLEM

Consider a horizontal two dimensional rectangular porous material with two opposite walls at constant but different temperatures and the other two vertical thermally insulated with H units height and W units wide as depicted in Fig. 1. Here T_H and T_C represent the temperature of the hot end cold walls, respectively. All the walls of the cavity are further assumed to be impermeable. The fluid and the porous medium are treated as a homogeneous, isotropic system with an equivalent heat

conductivity. The fluid is assumed to be normal Boussinesq fluid and the density ρ is taken to be a linear function of the temperature T . A non dimensional form of the mass, momentum and energy equations, using the Darcy's law and the Boussinesq approximation are used in a model solved by the finite difference technique. Non dimensional variables X, Y, ψ, θ, U and V are used for the distances x and y , stream function, temperature T and horizontal and vertical velocities respectively. Their values are expressed in the nomenclature.

The relevant hydrodynamic and thermal boundary conditions are $X=0$ and $1, \partial\theta/\partial X=0; Y=0, \theta=1; Y=1, \theta=0; \psi=0$ around the boundary.

The governing parameters for the present problem are the aspect ratio A and the Darcy-Rayleigh number Ra

$$A = W/H \quad \text{and} \quad Ra = Kg\beta(T_w - T_c)K\rho/\alpha\mu$$

where K, β, g, α and μ are the permeability, coefficient of thermal expansion, acceleration due to gravity, effective thermal diffusivity and dynamic viscosity, respectively.

The local and overall heat transfer are best characterized by the local and average Nusselt number for each isothermal wall of the enclosure, defined as follows:

$$Nu(x) = -\partial\theta/\partial Y \quad \text{and} \quad Nu = -\int_0^1 (\partial\theta/\partial Y) dX$$

The flow is characterized by two variables ψ_{max} and a non-dimensional average fluid velocity over the area A, U_m defined as follows:

$$\psi_{max} = \pm \max |\psi(x,y)| \quad \text{and} \quad U_m = \int_A (U^2 + V^2) dA$$

For the validity of this model, a comparison of some results is done with an experimental work of Close et al [7]. The comparisons is presented in a previous work of the author [6] and showed good agreement. More detailed information about the formulation, the model and the numerical method of solution can be found in [6].

3. RESULTS AND DISCUSSION

Since the primary object of this study is to examine the effects of the aspect ratio on the nature of convective heat flow, a wide range of aspect ratio, $1 \leq A \leq 8$ has been considered for a range of Darcy-Rayleigh number up to 800. Numerical results for the rectangular cavity filled with a saturated porous media has been obtained. The vertical walls of the cavity are adiabatic and the horizontal walls are isothermal with lower hotter one and upper colder one.

3.1 Temperature and Flow Field

The isotherms and flow patterns are first presented for aspect ratios $A = 1, 2, 3, 4, 5$ and 7 and $Ra = 100$ and 400 in

Figs 2, 3 and 4, respectively.

By the case of Darcy-Rayleigh number $Ra=100$ shown in Fig. 2, Because of the buoyancy effects, a circulating motion is established, filling the entire cavity and rotating slowly in the counter clockwise direction with single extremum value of stream function ψ_{max} for the aspect ratio $A=1$. By the increase of the aspect ratio the fluid is required to move all the way up to the top surface to reject the heat gained at the base. Then at the top surface the colder and denser fluid tends to topple over and returns to the lower surface, this causes the appearance of the two dimensional cellular pattern. Three cells appear by $A=2$ and 3, five cells by $A=4$, and seven cells by $A=5$ and 7. Therefore, besides the conduction heat transfer exists also the natural convective heat motion with multiple cells circulating in alternate directions.

With the increase of Darcy-Rayleigh number, for an example by $Ra=400$, the flow which is shown in Fig. 3, is characterized with vigorous motion and higher stream functions. In this case the number of cells increases for example from 1 to 2 by $A=1$, from 3 to 5 by $A=3$ and from 7 to 9 by $A=7$. The streamlines become denser near the boundaries of the cells than near the middle.

The temperature fields are shown in Figures 2 and 3 for the cases of $Ra=100$ and 400 and different Aspect ratios. The temperature field is significantly modified in the regions where the convective transport is larger. The isotherms deviate up towards the cold surface as the hotter convective flow moves up after picking up the heat from the lower boundary and it deviates down towards the hot surface as the colder flow returns to the lower surface after rejecting the heat. As the Darcy-Rayleigh number increases the isotherms deviate more towards the horizontal isothermal upper and lower walls and become denser than in the middle of the cells.

Table 1 represents the number of cells as a function of the aspect ratio for a wide range of Darcy-Rayleigh number. The number of cells is equal to 1 for all the aspect ratios and the $Ra < 40$ where pure conduction heat flow occurs. With the increase of the Ra and the existing of the convective heat transfer mode the number of cells increase for all the aspect ratios. With the more increase of the Darcy-Rayleigh number Ra the number of cells decreases again in some cases.

The non-dimensional average flow velocity U_m is shown in Fig. 5 for the different aspect ratios and Darcy-Rayleigh number. The U_m is nearly independent on the aspect ratio, but increases with the increase of Darcy-Rayleigh number due to the increase of the driving buoyancy force. U_m increases linearly with the increase of Ra as shown in Fig. 6 with the following relationship

$$U_m = 4.6676 Ra - 430.39$$

The extremum values of the stream function ψ_{max} is shown in Fig. 7 for different values of aspect ratios and wide range of Darcy-Rayleigh number. ψ_{max} decreases with the increase of the aspect ratio, although it is nearly constant and independent on the aspect ratio. This indicates that the maximum velocities always occur at the boundaries of the cells, where the stream lines are denser and closer to each other than near the middle of the the cells, where the maximum values of stream functions occur.

Table 1 Number of cells as a function of the aspect ratio A and the Darcy-Rayleigh number Ra

Ra \ A	1	2	3	4	5	7
20	1	1	1	1	1	1
50	1	1	1	5	5	7
100	1	3	3	5	7	7
200	2	3	5	5	7	7
300	2	3	5	5	7	9
400	2	3	5	5	7	9
600	2	3	5	5	7	8
800	2	3	5	5	7	8
1000	2	3	5	5	6	7

3.2 Heat Transfer

Interesting features of the buoyancy-driven flow are further exhibited by the distribution of local Nusselt number on the horizontal walls which participate more effectively in the heat transfer process. The local Nusselt number $Nu(x)$ on the lower hotter surface is presented in Figures 8 and 9, and on the upper colder surface are presented in Figures 10 and 11 for the aspect ratios 1, 3 and 7 and both the Darcy-Rayleigh numbers $Ra=100$ and 400, respectively. As mentioned in [6], most of the heat is transferred at several localized spots at the walls, these corresponds to the boundaries between the cells. At these boundaries the flow of heat is directly from the hotter to the colder wall. So, the local Nu is maximum at the hotter wall and is minimum at the colder one, this phenomenon can be also shown in Figures 8-11. In the other side, where the flow is in the opposite direction, i.e. returning from the colder wall to the hotter wall, a minimum point in the local Nu occurs at the lower hotter wall and a maximum point in the local Nu occurs at the upper colder one. Thus, the points of maximum and minimum values i.e. the turning points, in the local Nu occur at the boundaries between the cells. The number of these turning points is equal to the number of cells in the flow. Therefore, the number of these cells increases as the aspect ratio increases.

Fig. 12 represents the global Nusselt number as a function of the aspect ratio at both the lower hotter and the upper colder horizontal walls for Darcy-Rayleigh number up to 1000. By the change of the aspect ratio the global Nusselt number remains nearly constant, i.e. it is independent on the aspect ratio. At the same time, the global Nusselt number increases with the increase of Darcy-Rayleigh number. A logarithmic relation between the global Nu and the Darcy-Rayleigh number is shown in Fig. 13 and takes the following important form:

$$Nu = 1.59344 \ln Ra - 5.186$$

4. CONCLUSIONS

A numerical study has been conducted to analyse the effects of the aspect ratio on the natural convection in horizontal two dimensional rectangular porous media with adiabatic vertical walls and isothermal horizontal hotter lower wall and colder upper one. A wide range of aspect ratio up to 8 with a wide range of Darcy-Rayleigh number up to 1000 was considered.

In the region of Darcy-Rayleigh number, where conduction heat transfer is accompanied with the convective heat transfer mode, exists the following:

- By the increase of the aspect ratio a two dimensional cellular pattern exists with multiple cells circulating in alternate directions and the motion becomes vigorous with higher stream functions as the Darcy-Rayleigh number increases..
- The isotherms is significantly modified in the regions where the convective transport is larger.
- The number of cells in the flow increases as the aspect ratio increases.
- The non-dimensional average flow velocity U_m is independent on the aspect ratio and increases with the increase of the Darcy-Rayleigh number linearly by the relation:

$$U_m = 4.6676 Ra - 430.39$$
- The extremum value of stream function ψ_{max} decreases with the increase of the aspect ratio and the maximum flow velocities occur at the boundaries of the cells, where the streamlines are denser and closer to each other
- The turning points in the local Nu occur at the boundaries of the cells with number equals to the number of cells, i.e. this number increases as the aspect ratio increases.
- The global Nu at the isothermal horizontal walls is independent on the aspect ratio and increases with the increase of the Darcy Rayleigh number by the following logarithmic relation

$$Nu = 1.59344 \ln Ra - 5.186$$

5. NOMENCLATURE

A	aspect ratio = W/H
g	acceleration due to the gravity, m^2/s
H	height of the porous material, m
K	permeability of the porous medium, m^2
Nu	global Nusselt number at the wall
Nu(x)	local Nusselt number
Ra	Darcy-Rayleigh number = $g \beta K (T_h - T_c) / \alpha \nu$
T	Temperature, K
T_h, T_c	temperatures of hot and cold isothermal walls, K
u	field velocity in the x direction, = $\partial \phi / \partial y$, m/s
v	field velocity in the y direction, = $-\partial \phi / \partial x$, m/s
x, y	spatial coordinates
X,	dimensionless distances on x axes = x/W
Y	dimensionless distances on y axes = y/H
W	width of the porous material, m
α	thermal diffusivity of porous material, m^2/s
β	coefficient of volumetric expansion, K^{-1}
μ	dynamic viscosity of the saturated fluid,
ν	kinematic viscosity of the saturated fluid, m^2/s
ρ	fluid density
ϕ	stream function
ψ	dimensionless stream function = $\phi H / \alpha W$
ψ_{max}	maximum extremum value of the stream function
θ	dimensionless temperature = $(T - T_c) / (T_h - T_c)$

6. REFERENCES

1. Burns, P.J., Chow, L.C., and Tien, C.L., "Convection in a vertical slot filled with porous insulation", International Journal of Heat and Mass Transfer, Vol. 200, 1977, pp. 919-926
2. Walker, R.L., and Homsy, G.M., "Convection in a porous cavity", Journal of Fluid Mechanics, Vol. 87, 1978, pp 449-474.
3. Hickox, C.E., and Gartling, D.K., "A numerical study of natural convection in a horizontal porous layer subjected to an end to end temperature difference", ASME Journal of Heat Transfer Vol. 103, 1981, pp 797-802.
4. Nilson, R.H., "Natural convective boundary layer on two dimensional and axisymmetric surfaces in high Pr fluids or in fluid saturated porous media," ASME Journal of heat Transfer, Vol. 103, 1981, pp. 803-807.
5. Chan, Y.T., and Banerjee, S., "Analysis of transient three dimensional natural convection in porous media", ASME Journal of Heat Transfer, Vol. 103, 1981, pp.242-248.
6. El Kady, M.S., "Numerical study of natural convection in a rectangular porous medium" MEJ. Mansoura Engineering Journal, Vol. , June 1990, pp.M -M .
7. Close, D.J., Symons J.G., and White, R.F., "Convective heat transfer in shallow gas filled porous media: experimental investigation", Int. J. Heat and Mass Transfer, Vol. 28, No. 12, PP 2371-2378.



A = 1



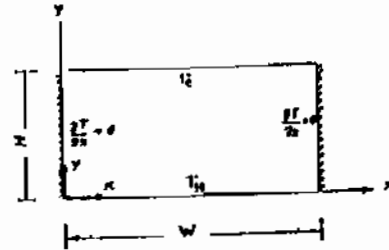


Fig. 1 Schematic diagram of the rectangular porous cavity, coordinate system and the thermal boundaries



A = 2

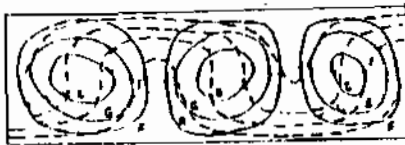


A = 3

$\delta = 0.1$



A = 4

- A=0.1
- B=0.2
- C=0.3
- D=0.4
- E=0.5
- F=0.6
- G=0.7
- H=0.8
- J=1.0
- K=1.2
- L=1.5
- M=2.0
- N=3.0
- P=4.0
- Q=5.0

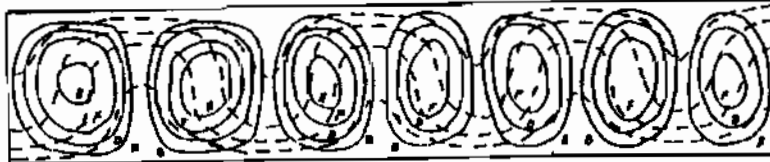

A = 5

A = 7

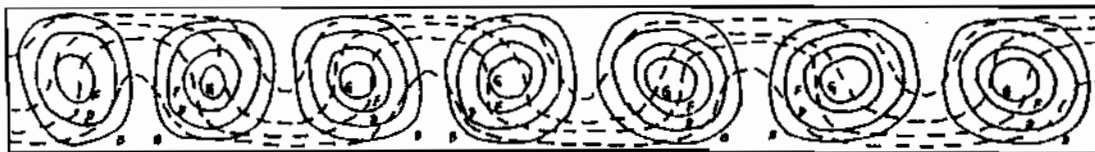


Fig. 2 Streamlines and Isotherms for different aspect ratios and Darcy-Rayleigh number $Ra=100$

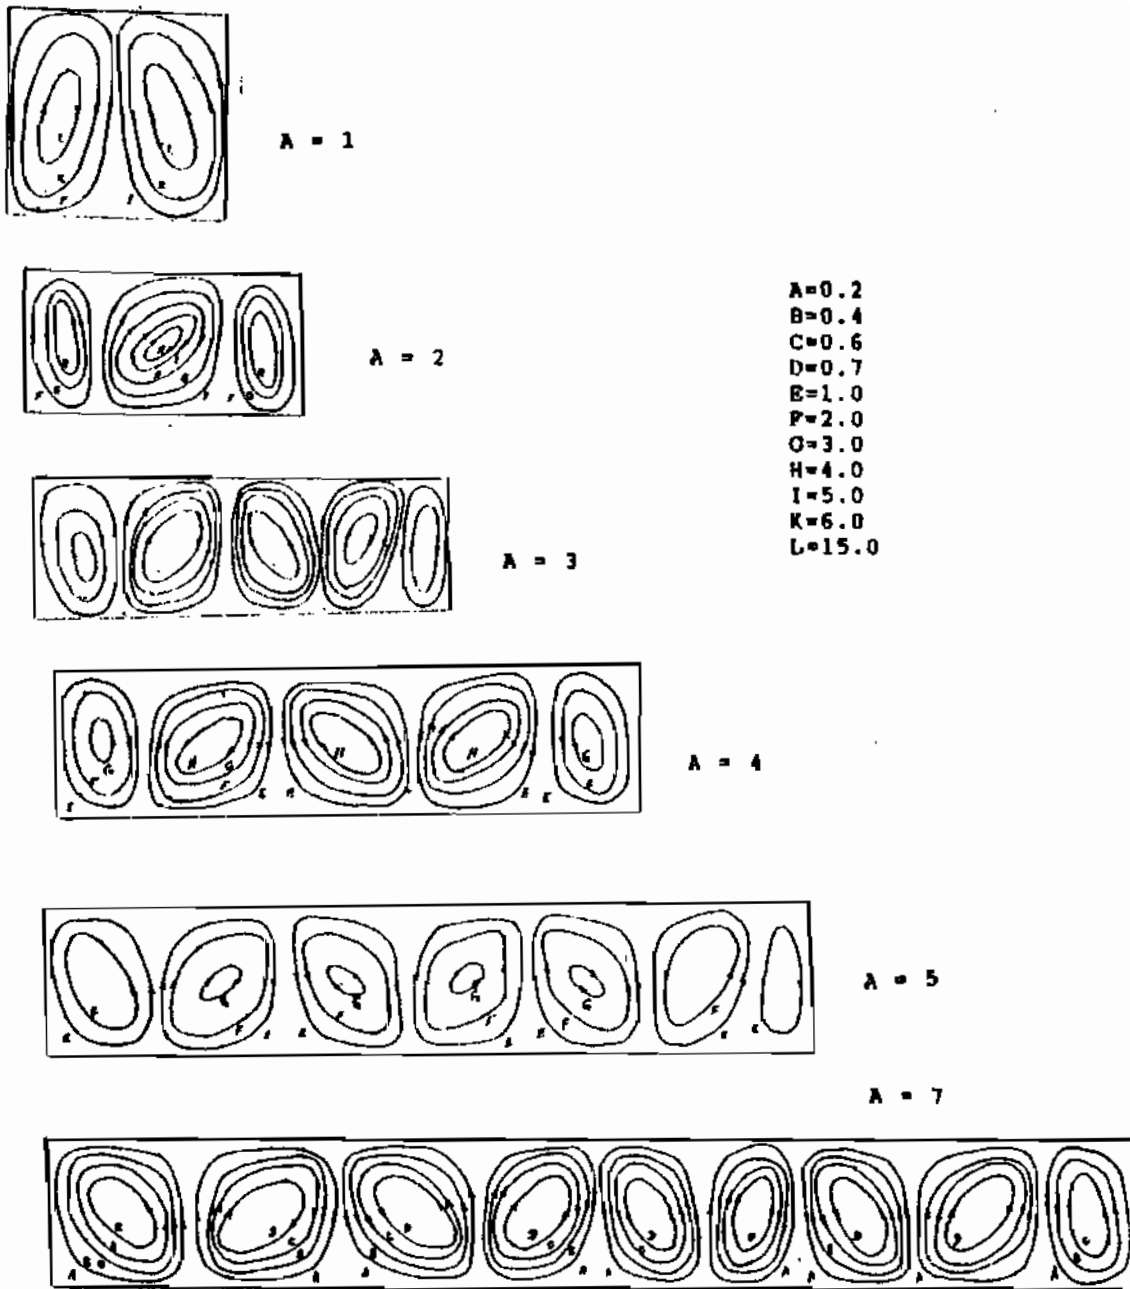


Fig. 3 Streamlines for different aspect ratios and Darcy-Rayleigh number $Ra = 400$

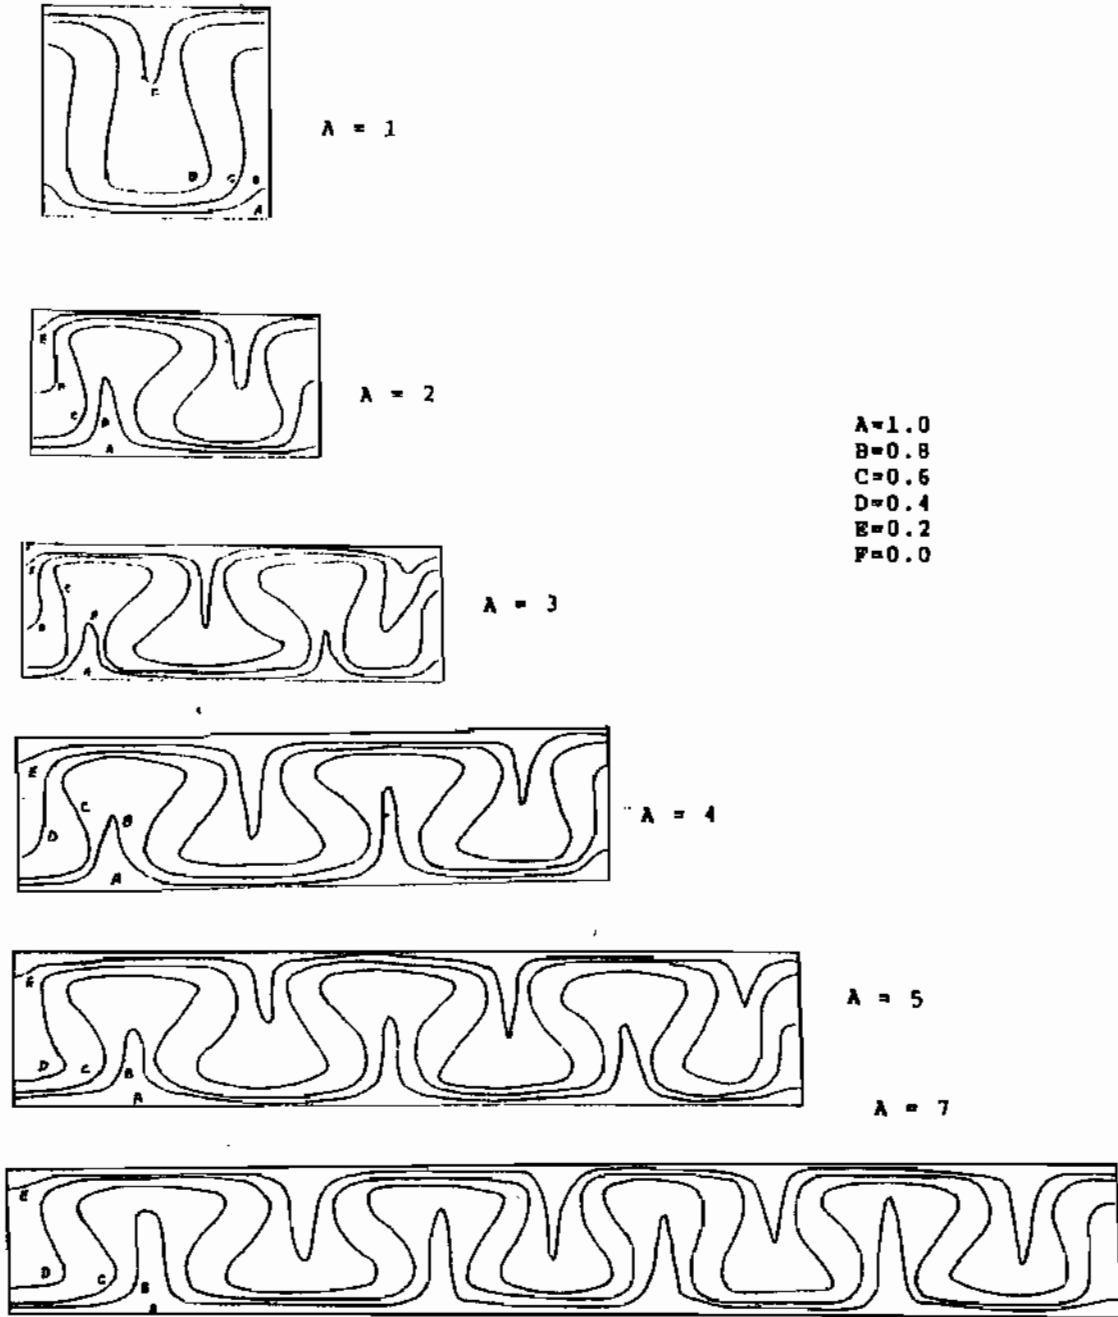


Fig. 4 Isotherms for different aspect ratios and Darcy-Rayleigh number $Ra = 400$

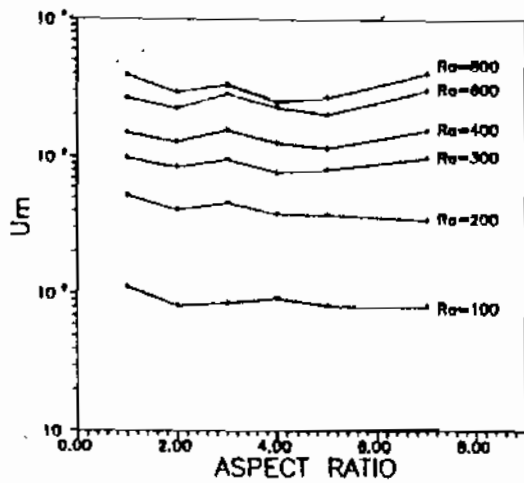


Fig. 5 Fluid non-dimensional average speed as function of aspect ratio for different Darcy-Rayleigh number

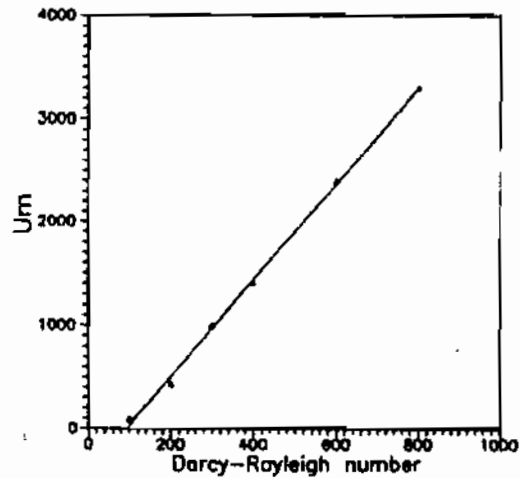


Fig. 6 Fluid non-dimensional average speed as a function of the Darcy-Rayleigh number

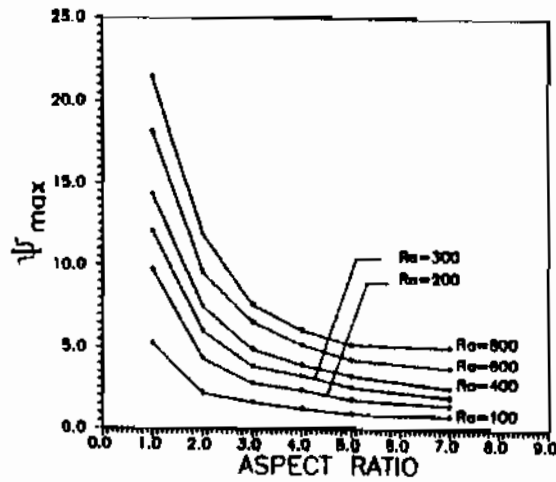


Fig. 7 Maximum non-dimensional stream function as function of aspect ratio for different Darcy-Rayleigh numbers

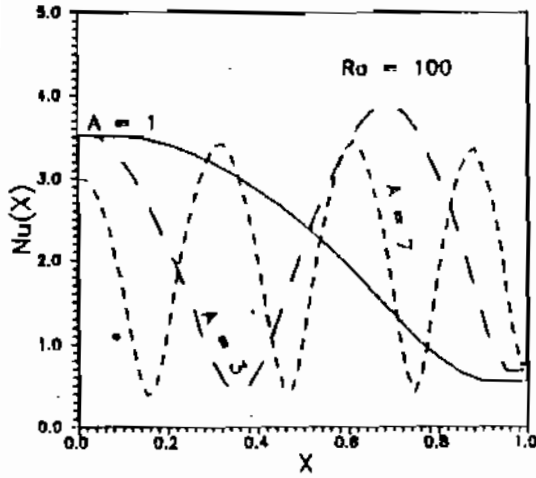


Fig. 8 Spatial variation of local Nusselt number at the lower hotter horizontal wall at $Ra = 100$

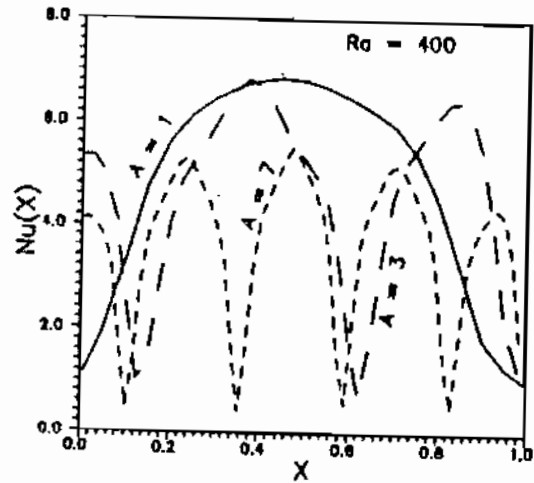


Fig. 9 Spatial variation of local Nusselt number at the lower hotter horizontal wall at $Ra = 400$

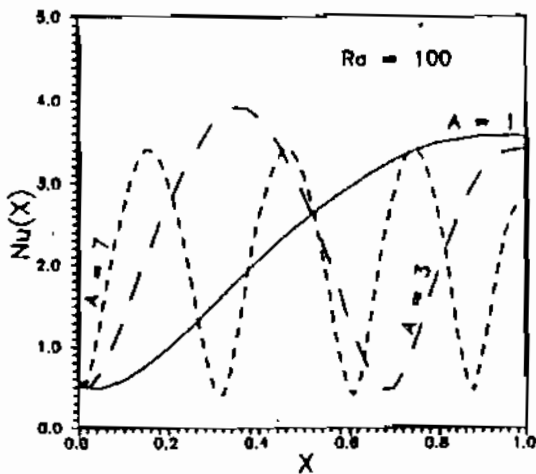


Fig. 10 Spatial variation of local Nusselt number at the upper colder horizontal wall at $Ra = 100$

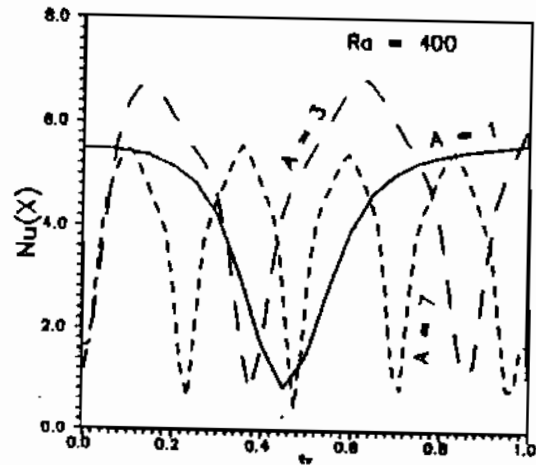


Fig. 11 Spatial variation of local Nusselt number at the upper colder horizontal wall at $Ra = 400$

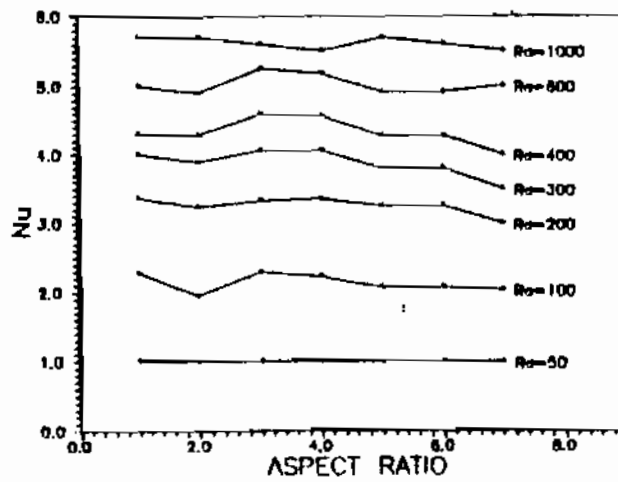


Fig. 17 Global Nusselt number as a function of aspect ratio at the upper and lower isothermal walls

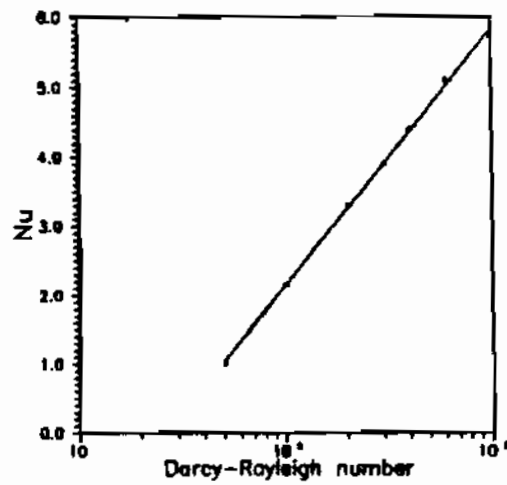


Fig. 13 The global Nusselt as a function of Darcy-Rayleigh number at the upper and lower isothermal walls.